

FTTX



A Furukawa Company

WDM Optical Access Module (Wave Division Multiplexer)

High-Density 1310, 1490, 1550 FTTX Solution

Product Description

Today's FTTX systems demand innovative solutions. The WDM Optical Access Module (OAM) is designed for video, voice, and data services in FTTX architectures. All three services can be combined over a single fiber layer with this module. Maximize your shelf configuration with use of 2 circuits per module while using traditional 7" LGX® Fiber Optic Shelves.

Features and Benefits:

- Facilitates two circuits
- SC, SCA Adapters
- Compatible with 7" LGX Frames
- < 1.2 dB loss
- High isolation between channels
- Supports 1310, 1490, 1550 nm
- FTTX ready: GPON, BPON, EPON
- Supports Video, Data, Voice
- Uses a single module through network
- Easy installation
- Maximizes AllWave® and AllWave FLEX ZWP Fiber.




WDM Optical Access Module Ordering Information:

Comcode	Product Code	Description
300534419	W2-1X2-1345-SCUSCA/SCA-S-BAL-C-TFF	WDM 3 band product 2 TFFs



WDM Optical Access Module Performance Specifications

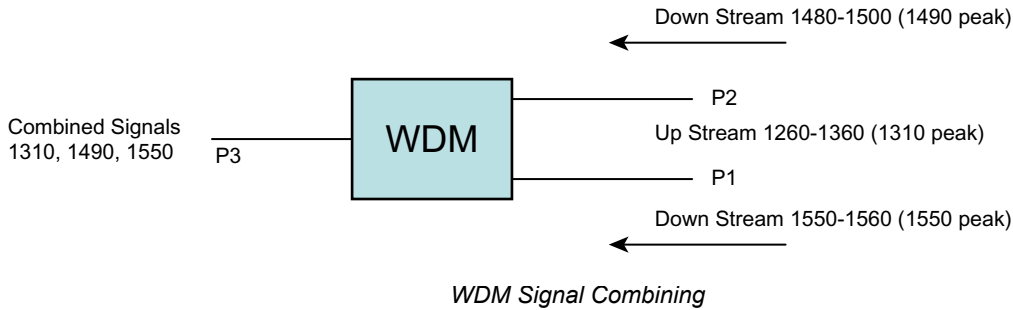

Thin Film WDM Filter

Max Insertion Loss with connectors	< 1.2 dB
Max Loss Variability across Band	< ±0.25 dB
Minimum Return Loss	50 dB
Minimum Directivity	50 dB
Maximum Input Power for Port 1	25 dBm
Maximum Input Power Port 2 and 3	10 dBm
Polarization Dependent Loss	.2 dBm
Polarization Mode Dispersion	.25 ps
Port 2 to 3 Operating Wavelength	1260-1360 nm and 1480-1560 nm
Port 1 to 3 Operating Wavelength	1550-1560 nm
Port 2 to 3 Isolation @ 1550 nm	≥ 20 dB
Port 1 to 3 Isolation @ 1310/1490 nm	≥ 20 dB



Use electronic files, available at:
www.ofsoptics.com - Use less paper

For additional information please contact your sales representative. You can also visit our website at <http://www.ofsoptics.com> or call 1-888-fiberhelp.

AllWave and LGX are a registered trademarks and Access ADVANTAGE is a trademark of Furukawa Electric North America, Inc.

OFS reserves the right to make changes to the prices and product(s) described in this document in the interest of improving internal design, operational function, and/or reliability. OFS does not assume any liability that may occur due to the use or application of the product(s) and/or circuit layout(s) described herein.

This document is for informational purposes only and is not intended to modify or supplement any OFS warranties or specifications relating to any of its products or services.

Copyright © 2008 Furukawa Electric North America, Inc.
 All rights reserved, printed in USA.

OFS
 Marketing Communications
 fap-217-0908



A Furukawa Company

